


# GAOKEview Interactive Flat Panel

## E series


### E3 CVT982-Complete



Zero Bonding  
Technology



Full-function  
Type-C




Multi-tasking  
Android



Dual colors pen



WIFI-6



Auto-backlight



HDMI-OUT



Screen Mirror

## Display Parameter

Size (customizable)	65inch	75inch	86inch	98inch
Backlight Type	D-LED	D-LED	D-LED	D-LED
Panel Brand	BOE	BOE	BOE/LG	BOE/LG
Resolution(pixels)	3840x2160	3840x2160	3840x2160	3840x2160
Brightness	≥400cd/m2(typ.)	≥400cd/m2(typ.)	≥400cd/m2(typ.)	≥400cd/m2(typ.)
Aspect Ratio	16:9	16:9	16:9	16:9
Contrast Ratio	5000:1	5000:1	5000:1	5000:1
Response Time	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)
Pixel Pitch (mm)	0.372(H)x0.372(V)	0.4298(H)x0.4298(V)	0.4935(H)x0.4935(V)	0.5622(H)x0.5622(V)
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz
Viewing Angle	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)
Life Time	50,000 Hrs(min.)	50,000 Hrs(min.)	50,000 Hrs(min.)	50,000 Hrs(min.)
View Area (mm)	1428.48(H)x803.52(V)	1650.24(H)x928.26(V)	1650.24(H)x928.26(V)	2158.848(H)x1214.352(V)
Color Gamut (X% NTSC)	72%(NTSC)	72%(NTSC)	72%(NTSC)	72%(NTSC)
Colorfulness	1.07B(10 bit)	1.07B(10 bit)	1.07B(10 bit)	1.07B(10 bit)
Panel	VA, haze haze 25%	VA, haze haze 25%	VA, haze haze 25%	VA, haze haze 25%
Touch Glass	AG coated glass, zero air-gap	AG coated glass, zero air-gap	AG coated glass, zero air-gap	AG coated glass, zero air-gap
Light transmittance	92%	92%	92%	92%
Static contrast	4000:1	4000:1	4000:1	4000:1
Dynamic contrast	8000:1	8000:1	8000:1	8000:1
VESA mounting	800 x 600mm	800 x 600mm	800 x 600mm	800 x 600mm

## System

Chipset	Amlogic T982
CPU Architecture&Working Frequency	Quad-core A55, 1.8GHz
GPU	Mali G52MP2
RAM	Standard: 4GB DDR4 / Optional: 8GB DDR4
ROM	Standard: 32GB / Optional: 128GB
OS	Android 13.0
Power Requirements	AC 100 V ~ 240 V, 50/60 Hz
65" Power Consumption Without OPS	240W
75" Power Consumption Without OPS	320W

86" Power Consumption Without OPS	440W
98" Power Consumption Without OPS	610W
Standby Condition	< 0.5W
Audio Output Power	16W*2
Subwoofer(Optional)	20W*1
Integrated software	Note, web browser, file manager, cloud drives, WPS office, Share and EShare for wireless connection with Windows/iOS/Android devices
Kiosk mode	yes
Media playback	yes
Glass hardness	7H
Housing	metal
OSD key lock	yes
OSD languages	EN, DE, FR, ES, IT, RU, CZ, NL, PL, SV, FI, DA, NB
Control buttons	Power, Power Indicator, Remote Sensor, Light Sensor
Plug&Play	DDC2B
Orientation	landscape
Fanless design	yes
Power supply unit	internal
Power usage	222W typical, 0.5W stand by, 0.3W off mode
Stand	Mobile stand on wheels with mount kit for large format displays up to VESA 800x600mm SAME BRAND AS SMARTBOARD
MAF or DAF	Yes

## Front Interface

Public USB3.0	x3
Touch USB	x1
HDMI IN(v.2.0, max. 3840x2160 @60Hz,	x1
Type-C(Full Function) (v.3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz - RGB444 - (65W charging, Touch)	x1

## Rear Interface

RJ45 IN(LAN Control)	x1
RJ45 OUT(LAN Control)	x1
HDMI OUT(3840x2160 @60Hz)	x1
PC AUDIO IN	x1
EARPHONE OUT(3.5mm AUDIO OUT)	x1
VGA IN(max. 1920x1080 @60Hz)	x1

DP IN	x1
SPDIF OUT	x1
RS232(DSUB 9pin)	x1
USB 2.0	x1
USB 3.0	x2
HDMI IN 1(EARC)(v.2.0, max. 3840x2160 @60Hz, YUV444)	x1
HDMI IN 2(UART)(v.2.0, max. 3840x2160 @60Hz, YUV444)	x1
TOUCH USB	x1
MIC IN	x1
Type-C	x1
Audio input	x1
Audio output	x1
HDCP HDMI 1: 2.1, USB-C: 2.2	x1
USB ports	x5 (media playback / peripherals / storage – front side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 65W PD), right side: 2x v.3.2 (Gen 1, 5Gbit))
RJ45 (LAN)	x2 (Auto switch for PC & Android, 1000MB)
OPS Slot PC(optional)	x1

## Network

Wired Network	Support 10/100/1000Mbps
WiFi Standard	Built-in dual-channel WIFI, support AP hotspot
WiFi Protocol	WiFi:802.11 b/g/n      AP:802.11 a/b/g/n/ac
WiFi Working Frequency	WiFi:2.4GHz      AP:2.4G&5GHz
WiFi 6	Standard
WiFi Working Distance	0-12m

## Bluetooth

Standard	Built-in
Version	2.1/3.0/4.2/5.0)
Working Frequency	2.4Hz
Working Distance	0-12m

## Camera(Optional)

Quantity	1
Pixel	13MP/48MP

Position	Middle Top
Field of vision	DFOV: 100° HFOV::91.9° VFOV:60°
Resolution	Support 4K (under Windows)

## Microphone(Optional)

Quantity	8
Pick-up Distance	0-8m
View Angle	0°~180°

## Touch Parameter

Touch Type	Infrared Touch Frame
Surface Protection	4mm toughened glass
Infrared Touch	20 Points/40 Points
Interpolation Resolution	32768 x32768
Response Time	≤6ms
Input Mode	Finger or Pen
Theory Clicks	Unlimited
Minimum Touch Object	USB+RS232
Connect Type	4.75~5.25V
Touch accuracy	±1.5mm

## Structure Parameter

Size	65inch	75inch	86inch	98inch
Product Size(L x H x D)	1483.8x890x114mm	1706x1015x114mm	1953.2x1151.6x128.5mm	2216x1303.4x133.9mm
Package Size(L x H x D)	1614x1020x210mm	1836x1132x210mm	2083x1290x210mm	2356x1441.5x210mm
Housing Material (Face frame/rear shell)	Aluminum/Metal Plate			
Shell color (Face frame/rear shell)	Black&Gray/Black	Black&Gray/Black	Black&Gray/Black	Black&Gray/Black
VESA	4-M8 Screw Hole 600mmx400mm	4-M8 Screw Hole 800mmx400mm	4-M8 Screw Hole 800mmx600mm	4-M8 Screw Hole 800mmx600mm
Net Weight	43±1KG	56±1KG	68±1KG	92±5KG
Gross Weight	53±1KG	66±1KG	83±1KG	110±5KG

## Accessory

Power Cables	x1
Remote Control	x1

Touch Pen (Dual function tips)	X4
Power Cord	x1
HDMI Cable	x1
TOUCH USB Cable	x1
E-User's Manual	x1
Wall Mount	x1
Mobile Stand(Optional)	x1
Guides	quick start guide, safety guide

## Environment

Working Temperature	0°C~40°C
Working Humidity	10%~90%RH
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%RH
Working Altitude	Below 5000 meters
Max. non-stop operating time	24-Jul



## Warranty

Warranty Time	2 Years
---------------	---------

## Disclaimer

1. Due to the influence of many aspects such as configuration and manufacturing process, the actual size/weight of this product may vary. The specification is for reference only, please refer to the actual situation.
2. The product pictures attached to this specification are only for illustrative display, the actual effect (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
3. The packaging materials for this product are designed in strict accordance with the storage conditions of this product.
4. Abnormalities caused by extreme weather and long storage time cannot be guaranteed to be completely avoided. Please be informed.
5. Please store in strict accordance with the required storage conditions. Improper storage may cause abnormalities.
6. In case of any situation involving the above modification and update, no prior notice will be given.

Product View-86inch

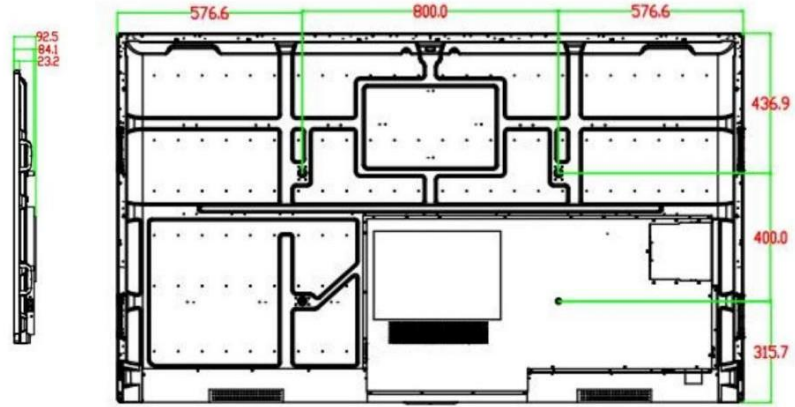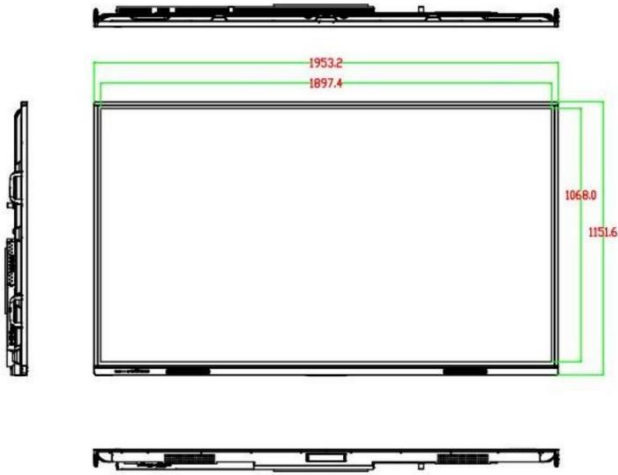



# MOBILE STAND

## GK-MS04L

Universal wheel

Pen tray

Firm and secure

### Structure

Color	Gray
Product Size (L*W*H)	1160*650*1560mm
Package Size (L*W*H)	1500*700*140mm
Net Weight	18.5 KG
Gross Weight	20.5KG
Product Material	Cold Rolled Steel
Load Bearing	≤ 120KG
Support Panel Size	55-86inch
Casters	Size: 2inch Mute wheel Color: Black

### Accessory

Screw Pack	1 pcs
Installation Instruction	1 pcs

### Environment

Working Temperature	0°C ~ 40°C
Working Humidity	10% ~ 90%RH
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10% ~ 90%RH



## >> Product Feature

