

GAOKEview Floor Standing Digital Signage-Android Version T982

Product Features



- The equipment adopts the industrial-grade design concept of display products; the body is thin, fashionable and beautiful, simple to install and easy to maintain; the unique heat dissipation process allows for long-term, uninterrupted and stable operation.
- 4mm tempered glass on the front; the frame is an integrated aluminum profile with delicate wire drawing process; the body is made of galvanized sheet and uses metal spraying technology to prevent discoloration and rust for a long time
- The backlight adopts the mainstream edge-type solution on the market, which has high brightness and long life; it uses the brand IPS high-definition LCD panel, which has gorgeous colors, high picture restoration, and can achieve high-quality picture output display.
- Equipped with a smart Android operating system, it is easy to operate, powerful, and runs smoothly without lag; it is pre-installed with information publishing software and can be operated on a stand-alone/local/cloud basis; it supports third-party software installation to meet diversified usage needs..

- It is widely used in many industries such as supermarkets, exhibition halls, buildings, government and enterprises, education, finance, medical care, transportation, hotels, catering, etc. It is a high-end display product with wide application scenarios and multiple functions.

Display Parameter						
Screen level	Brand new A+ brand LCD screen					
Size	43inch	50inch	55inch	65inch	75inch	85inch
Backlight Type	E-LED	E-LED	E-LED	E-LED	D-LED	D-LED
Resolution(pixels)	1080x1920	1080x1920	2160x3840	2160x3840	2160x3840	2160x3840
Aspect ratio	9:16	9:16	9:16	9:16	9:16	9:16
Brightness	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)
Response Time	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	8ms (typ.)
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
Contrast ratio	3000:1	3000:1	3000:1	3000:1)	3000:1	3000:1
View Area (mm)	529.2(H)x940.87(V) mm	616.4(H)x1095.84(V) mm	680.4(H)x1209.6(V) mm	803.5(H)x1428.48(V) mm	931(H)x1653(V) mm	1053(H)x1872(V) mm
Display Colors	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)

Structure Parameter						
Size	43inch	50inch	55inch	65inch	75inch	85inch
Border color	Black or silver					
Body color	Black					
Surface Material	4mm tempered glass					
	Physical tempering process					
Border material	Aluminum profile					
	Oxidation drawing process					
Body material	Galvanized sheet					
	Metal spraying process					
Packaging material	Neutral thickened carton					
Product dimensions (mm)	1733.8 (H) *578.45 (W) *450 (Including Base)	1733.8 (H) *665.62 (W) *450 (Including Base)	1873 (H)*729.6 (W) *450 (Including Base)	1983 (H) *852.72 (W) *450 (Including Base)	2245 (H) *1033.6 (W) *560 (Including Base)	2353 (H) *1171 (W) *560 (Including Base)
Package Size	1750*155*755 mm	1775*155*755 mm	1955*173*870 mm	2015*173*984 mm	2283*1113*198 mm	2388*1251*198 mm
Gross weight	36.8kg	39.9kg	48kg	60kg	107kg	128kg


System Configuration	
Operating System	Android
CPU	T982 Quad-core Cortex-A55 Max 1.9GHz
GPU	Mali -G52
RAM	4GB
ROM	32GB
Android Version	Android 14
Input interfaces	USB3.0 *1, USB OTG*1, TF Slot*1,LAN*1,DC-12V-IN HDMI*1
Audio Interface	3.5mm dual-channel audio interface*1
Network	Supports RJ45 R/A 100Mbps Ethernet; 2.4GHz + 5GHz dual-band Wi-Fi 6; Supports Wi-Fi 802.11 a/b/g/n/ac/ax protocols; Bluetooth 5.3; Supports external 4G and 5G modules.
System Upgrade	Supports OTA remote upgrade, USB Flash disk upgrade

System functions	
Software support	Supporting installation of third-party application software
WIFI-Hotspot	Support WIFI-Hotspot
Start-up method	Power on start
System Authority	Open the root privileges for customized software development
Remote monitoring	Real-time remote monitoring, self-recovery from system crashes, 24/7 unattended operation.
Play mode	Supports switching between server and standalone modes.
Language	Support Chinese, Traditional Chinese, English and other languages
Memory expansion	Support up to 256G TF card expansion
Customization	Customizable boot LOGO
Audio function	2-channel output (8 Ω /5W dual audio amplifier output)
Mouse and Keyboard Functions	Standard Android keyboard, third-party input methods(optional)
USB function	Updating/Playing Media Files/External Devices


Electrical Performance	
Applicable scene	Indoor Installation and using
Rated voltage	AC110-220V
Standby power	≅1W
Rated power	43" ≅55W 50" ≅75W 55" ≅90W 65" ≅110W 75" ≅360W 85" ≅400W
Working environment	Temperature-0℃~55℃/humidity 10%RH~90%RH
Storage environment	Temperature - 5℃~60℃/humidity 10%RH~90%RH
Life time	>80000 hours
Notes	Please do not use it in an environment exposed to rain, moisture, oil, or direct sunlight to avoid equipment damage.

Packing List	
Machine	x1
Matching screws	x1
Hex wrench	x1
Power Cord	x1
Remote control	x1
WiFi antenna	x1
Warranty card/Certificate of qualification	x1


Product View-43inch

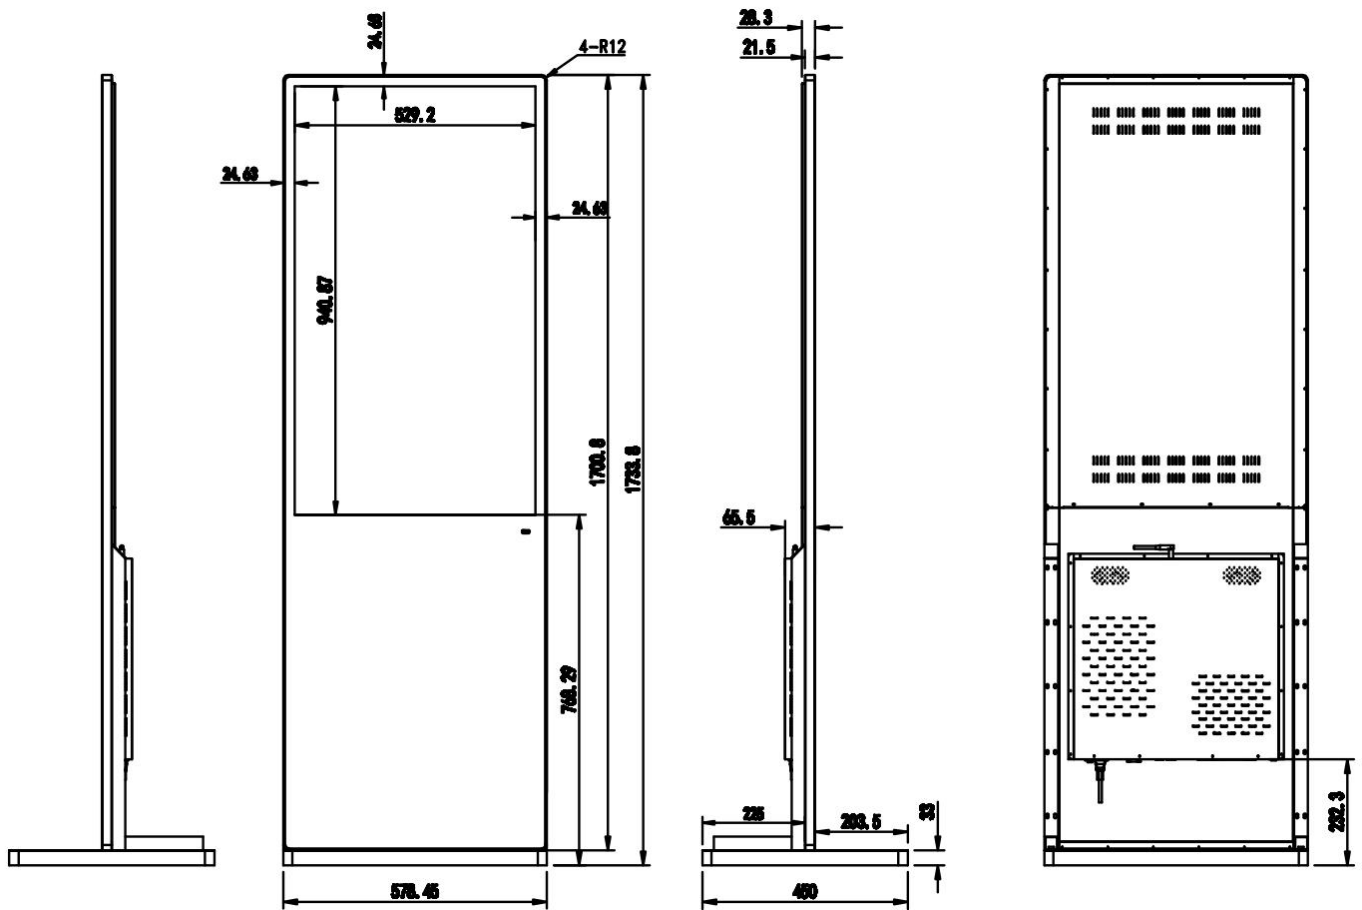


Product View-50inch

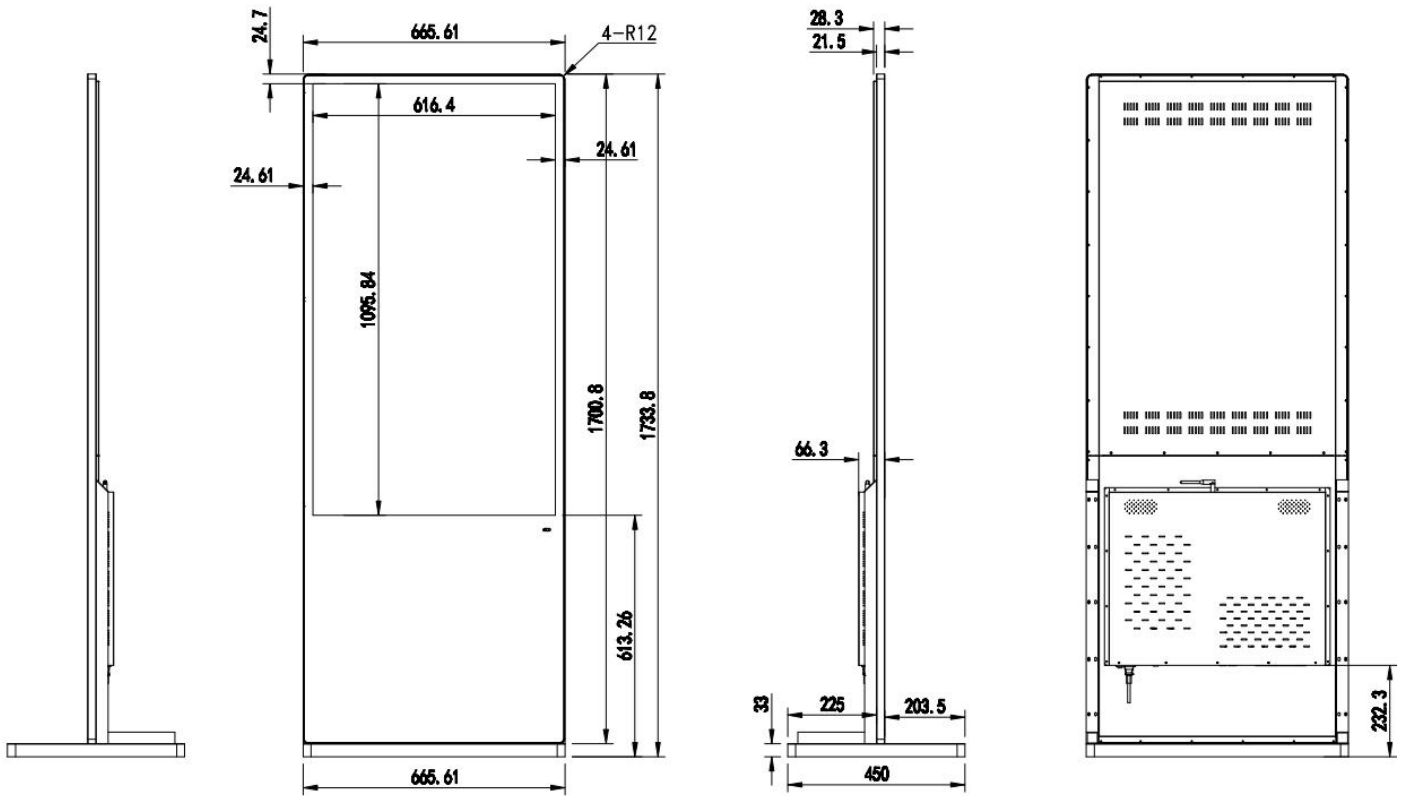


Product View-55inch

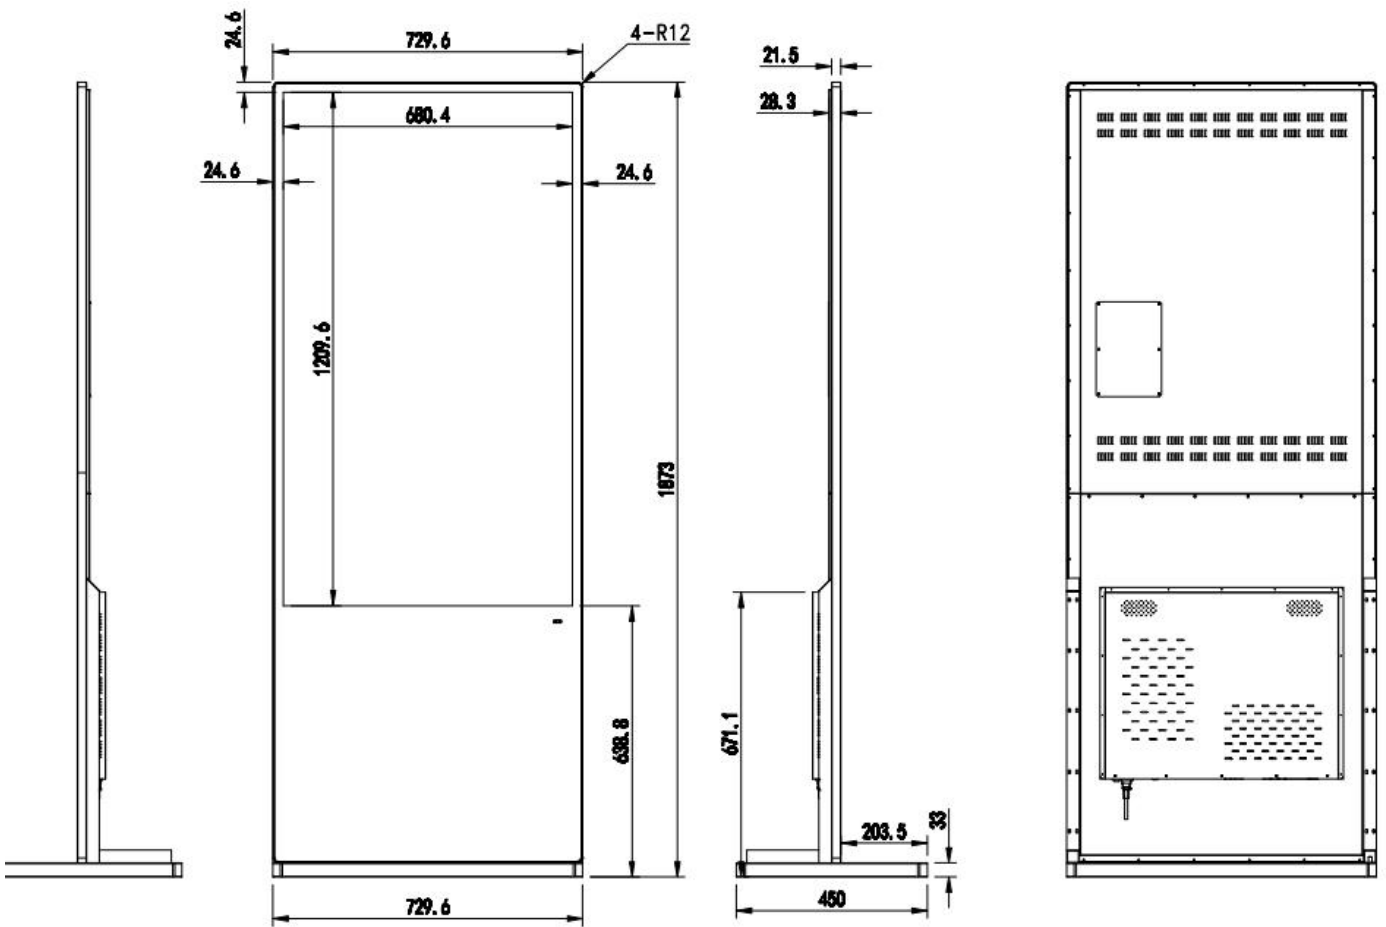

Product View-65inch

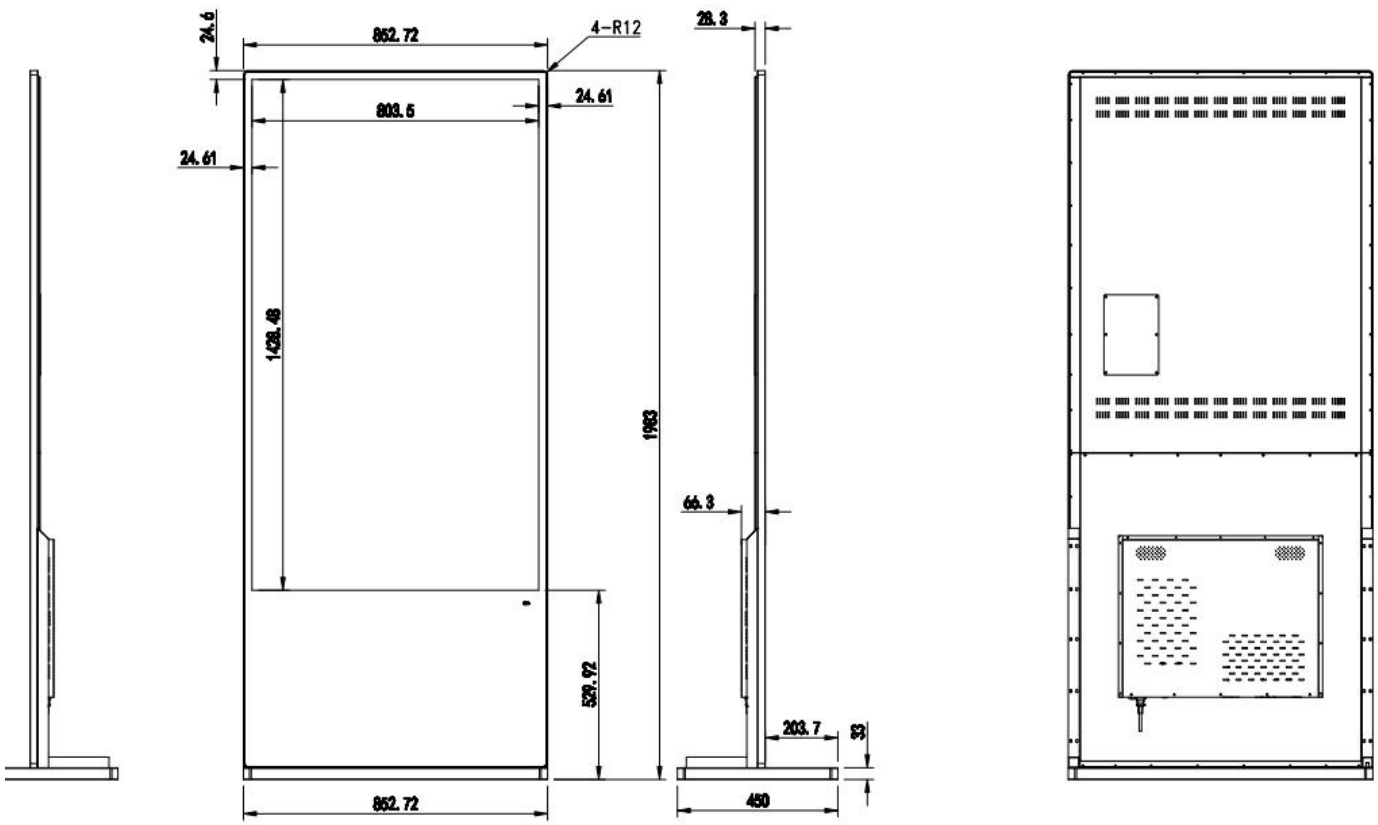

Product View-75inch

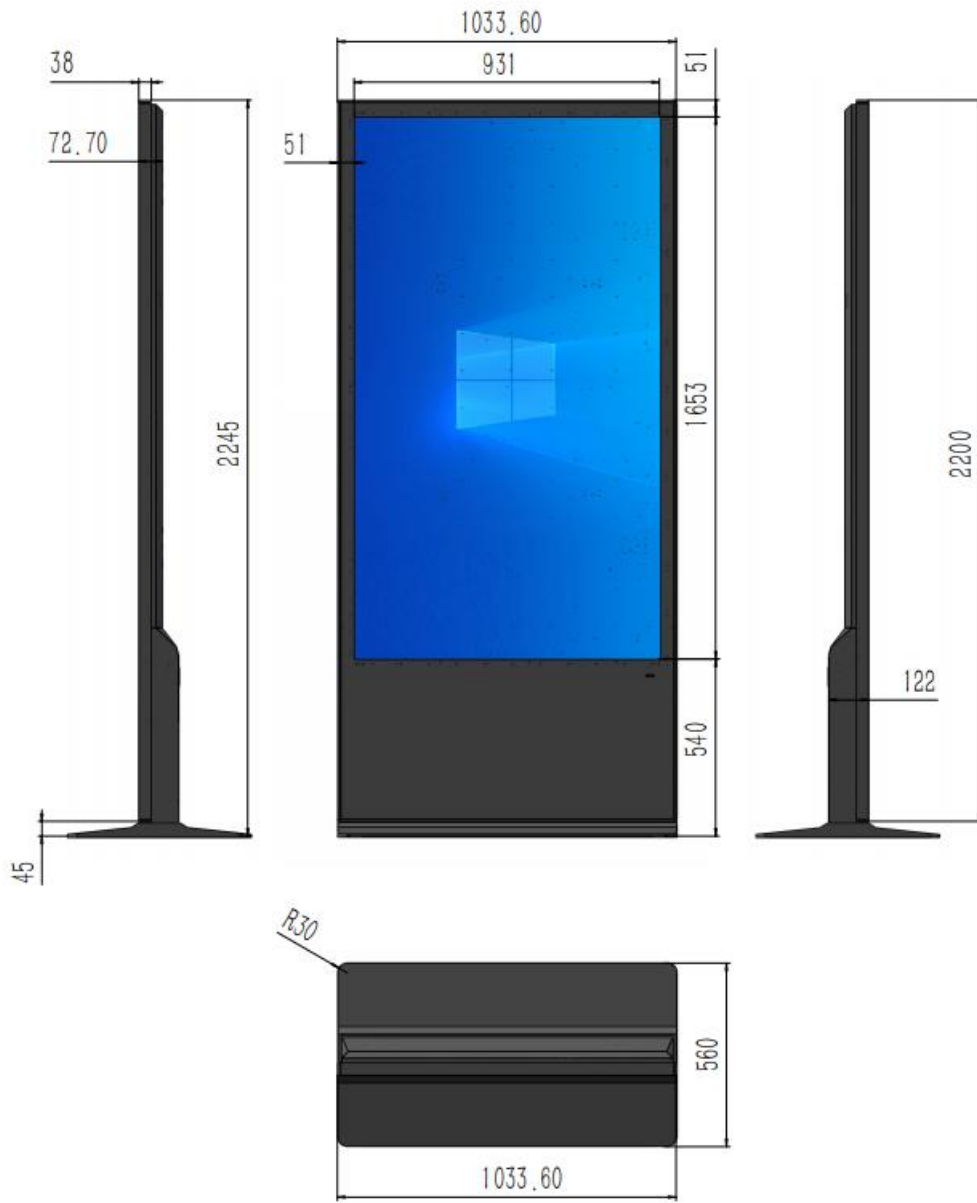

Product View-85inch

