


Floor-to-ceiling outdoor digital signage



21.5"~98"

Product parameter description

Display	LCD size	21.5"/32"/43"/49"/55"/65"/75"/86"/98"
	Panel type	TFT-LED
	Aspect ratio	16:9
	Physical resolution	2K 1920(RGB)*1080(FHD) / 4K 3840(RGB)*2160(FHD)
	Refresh rate	60Hz
	Brightness	2000cd/m ² 2500cd/m ² 3000cd/m ² 3500cd/m ²
	Contrast	1200:1
	Response time	8ms
	Perspective	178°/178°/178°/178°
	Display protection	6mm
	Backlight life	50000 h
	Brilliance control	Light sensing senso(Energy saving)
Material	Material	1.5mm galvanized steel sheet.Baking lacquer process
Protection level		IP65
Color		Black/White/Red/Silver Grey/Dark Grey/Customized
Heat dissipation method	Heat dissipation method	intelligent temperature controlledair cooling system
Touch	Optional	G+F/G+G Capacitive Touch
Operating System	/	Android/Windows/Linux
Work environment	Working temperature	-10°C ~50°C (if the ambient temperature is below -10°C, it is recommended to choose a heater)
	Working humidity	5% -90%
Power	Input	AC90V~240V 50~60HZ

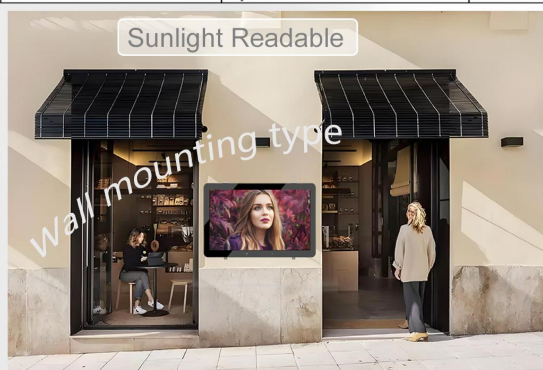

HD

Hd and bright



Network transmission



Waterproof and sunscreen



Support appearance customization
Support function customization
Dust proof design. Anti-theft design
Intelligent split screen



LOGO


Single column



Mobile bracket



Hanging-mount



A variety of installation methods